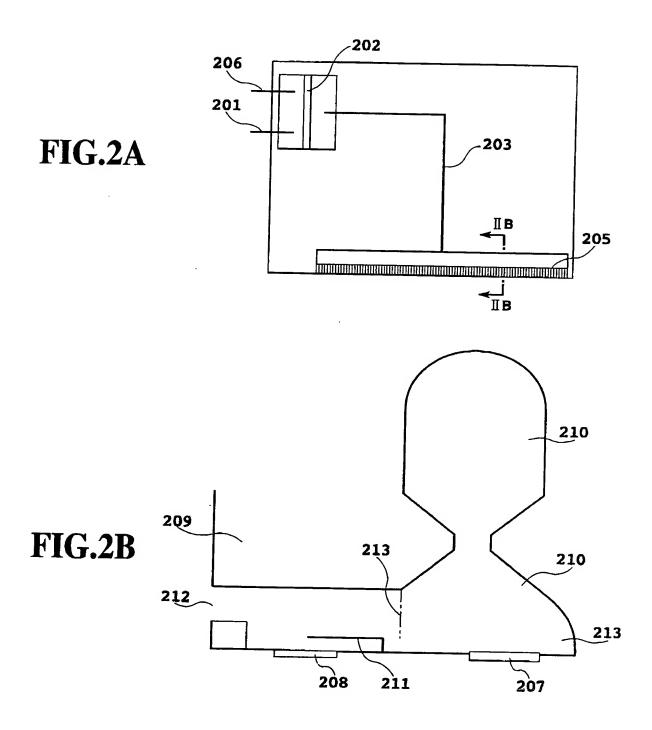
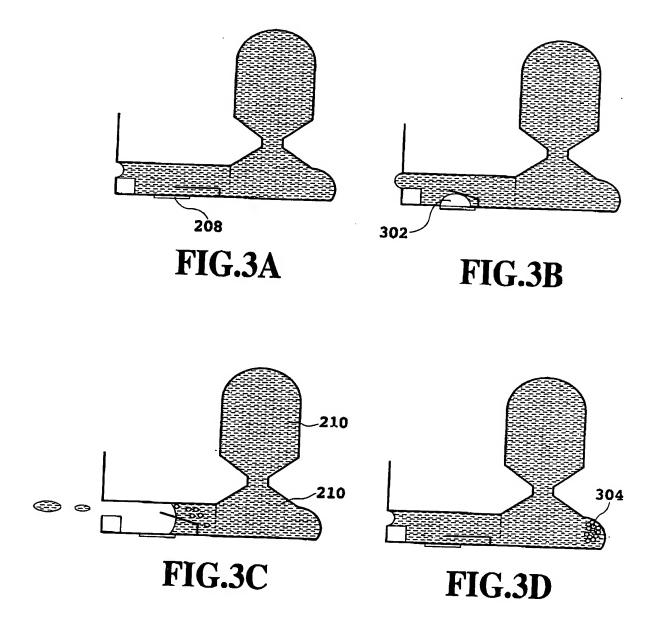
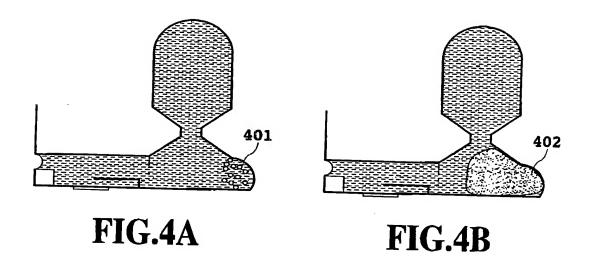



FIG.1









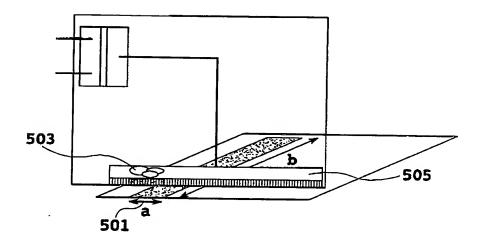


FIG.5A

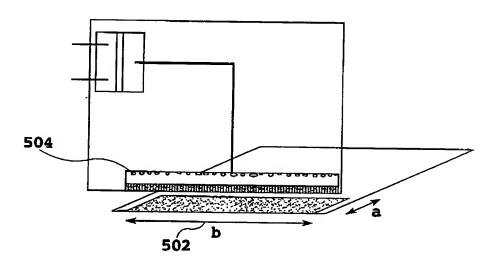


FIG.5B

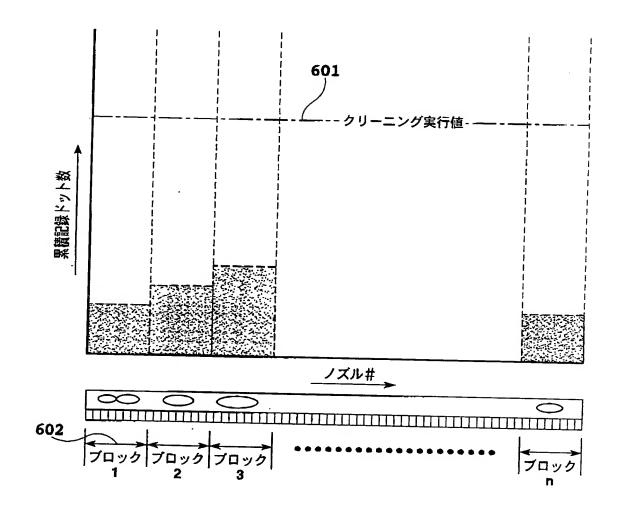


FIG.6

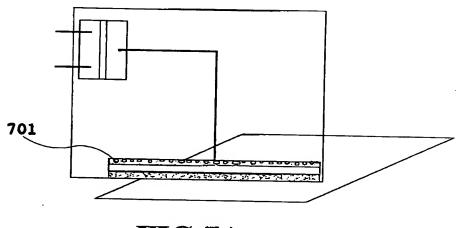


FIG.7A

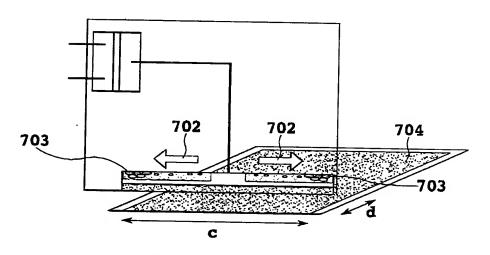
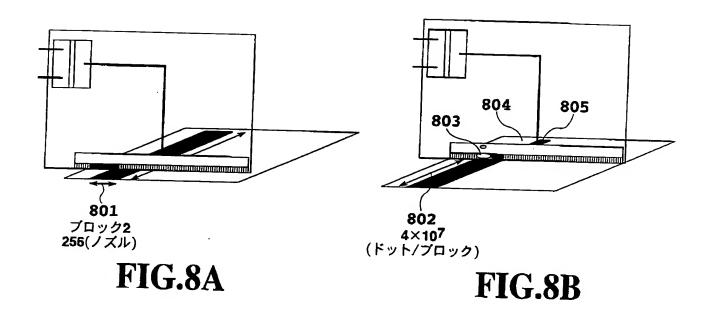


FIG.7B



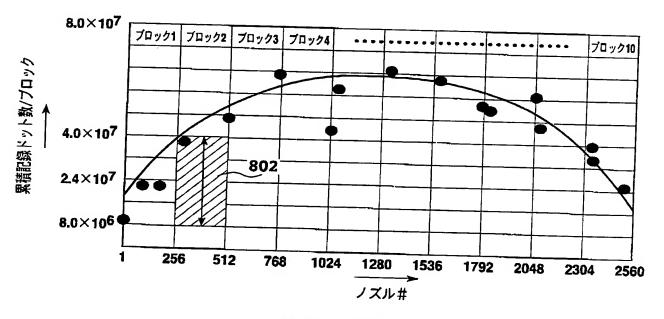


FIG.8C

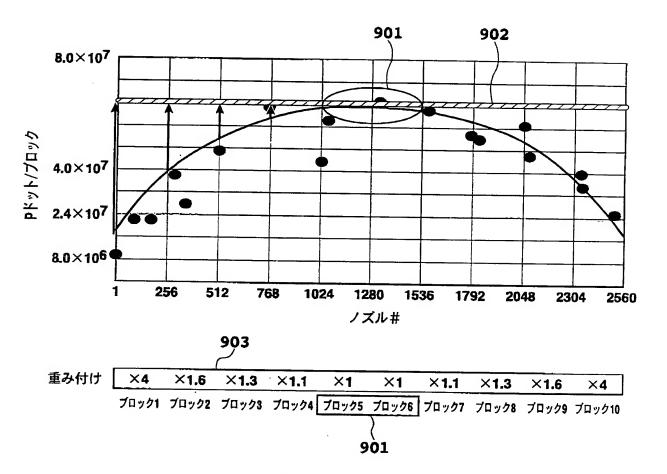
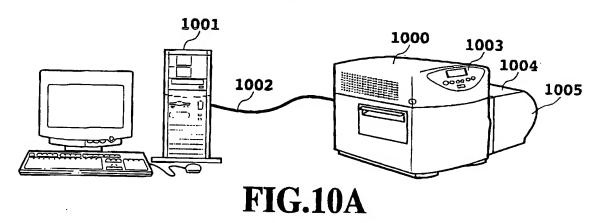


FIG.9



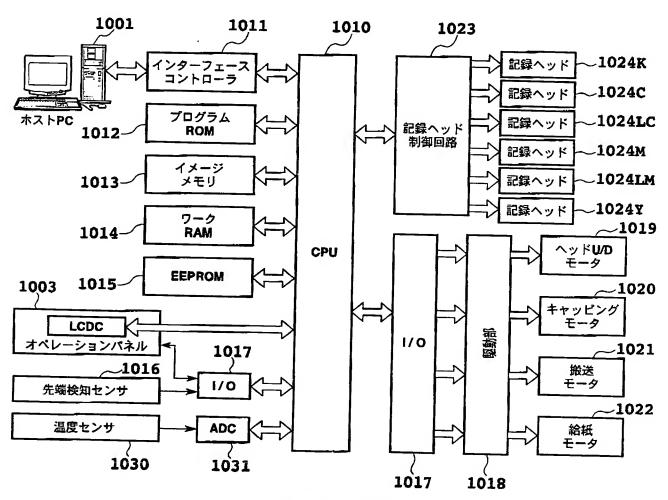


FIG.10B

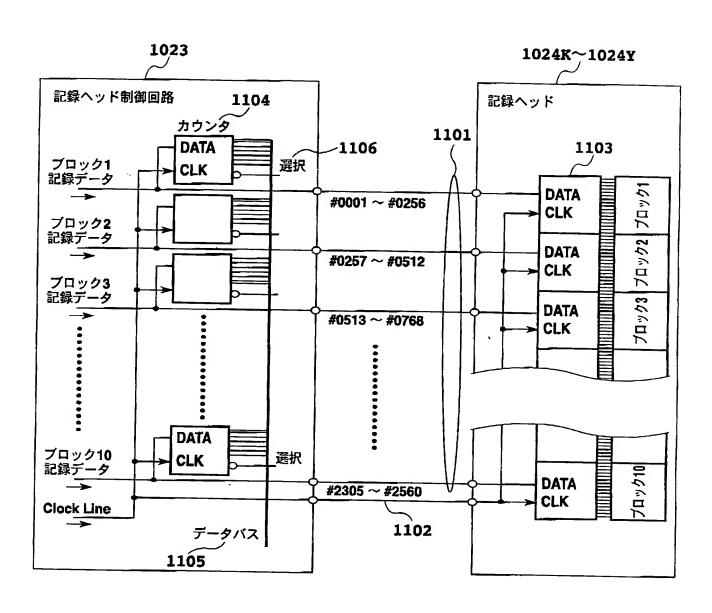


FIG.11

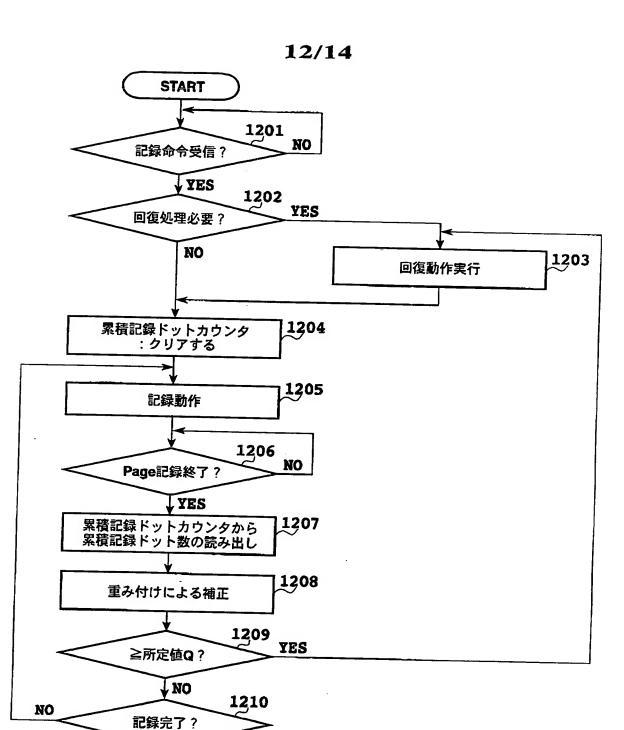


FIG.12

YES

END

プロック	5.0	4.0	3.0
グロック	1.8	1.6	1,4
ブロック 8	1.4	5.7	1.2
グログ	1.2	7:	1.0
プロック	17	1.0	1.0
ブロック	1.1	1.0	0:1
ブロック	1.2	Ξ	1.0
ブロック	1.4	1.3	1.2
ブロック 2	1.8	9.	1.4
ブロック	5.0	4.0	3.0
装置内油度	೨00₹	≱ 15 ℃	<15°C

FIG.13



